



"JOHNSON" EXIT / DIRECTIONAL SIGN BOX

TRIANGLE SERIES

"JOHNSON" "TRIANGLE" series Exit / Directional Sign Emergency Fluorescent Box is designed for controlled installation height - below 80mm – under concrete beam and false ceiling.

The Triangle series are available for single sided and double sided signage panel. Also, it is suitable for surface or corner installation. Even though the signage panel is in decline assembling. It maintains clear visualization.

“強生牌”“三角型”緊急照明出路燈箱配合受制於低橫樑及假天花安裝設計。

‘三角型’燈箱提供單面或雙面出口指示片，適合平面天花或角位天花安裝。雖然出口指示片傾斜安裝，但亦能提供清楚的出口指示。

NI-CD RECHARGEABLE BATTERY

MODEL 出路指示燈箱型號		JX20CN2-TNG/ JX20CN2-TNG-CF	JX14CN2-TNG/ JX14CN2-TNG-CF
Internal Conversion Kit 內藏電池套件		JF20N2	JF14N2
Lamp Type / Wattage 螢光燈種類 / 瓦數	(W)	T8 / 18W	T5 / 14W
Battery Capacity and Voltage 電池容量及電壓		5 x 1.8AH, 6V	5 x 1.8AH, 6V
Emergency Output 緊急照明輸出流明		300 lumens	250 lumens
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours	

NI-CD RECHARGEABLE BATTERY

MODEL 出路指示燈箱型號		JX20CN3-TNG/ JX20CN3-TNG-CF	JX14CN3-TNG / JX14CN3-TNG-CF
Internal Conversion Kit 內藏電池套件		JF20N3	JF14N3
Lamp Type / Wattage 螢光燈種類 / 瓦數	(W)	T8 / 18W	T5 / 14W
Battery Capacity and Voltage 電池容量及電壓		5 x 2.5AH, 6V	5 x 2.5AH, 6V
Emergency Output 緊急照明輸出流明		300 lumens	250 lumens
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours for 2 hours discharge, 24 hours for 3 hours discharge	
Dimension of Metal Housing 燈箱尺寸 (L x H x D)	(mm)	650 x 130 x 130	
SIGNAGE PANEL 燈箱膠片圖案及字樣		"EXIT" "出口" OR Escape Route Sign	
Main Voltage / Frequency 市電(交流電)輸入電壓 / 頻率	(V)/(kHz)	A/C 220V (+ / - 10%) / 50Hz	
Emergency Starting Time 緊急照明啟動時間	(sec.)	< 0.3	
Operating Frequency 運作環境溫度	(ta)	0°C -55°C	
Charge Indicator 充電指示		RED LED	
Test Button 測試掣		PRESS TYPE	
Low Voltage Protection 低壓截止保護線路		Electronic Protection (approx. 1V / cell)	
COMPLIANCE TO 達致認可標準		BS5266-1, BS EN 60598-2-22 and FSD PPA/104A (4 th Revision)	
GUARANTEE PERIOD 保用期		12 MONTHS	

Option: Sealed NI-MH High Temp. Rechargeable battery will be available on request.


These series comes with 2 type of casing :
燈箱構造分兩個系列：

1. Impact resistant and rectangle frame type
1. 堅固長三角型框架包出口指示塑膠片



Model : JX14CN2-TNG (Frame Type)

2. Two pieces of 2.5mm signage panels fixed firmly to the rigid casing.
2. 兩件2.5mm厚的出口指示塑膠片穩固地安裝於框架之上。

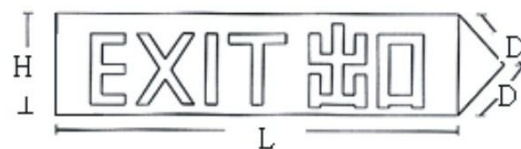

Model : JX20CN2-TNG-CF (Cut-off Type)