



**CLIP ON  
T8 Series**

**"JOHNSON" - CLIP ON series, Emergency Exit / Directional Sign Box, Maintained type.**  
Application for popular and economical emergency luminaires. The plastic "EXIT 出口"  
legend panel is clipped-on to the rigid housing by means for two screws.

"強生牌" 趨片式系列，長明式緊急照明出口指示燈箱，指示膠片直接趨入燈箱前部份，  
燈箱修邊鐵片，只需由兩粒螺絲固定。

**SPECIFICATION & TECHNICAL DATA**

規格及技術資料

**NI-CD RECHARGEABLE BATTERY**


| MODEL<br>套件型號                         |     | JX10CN2       | JX20CN2       | JX30CN2       | JX40CN2       |
|---------------------------------------|-----|---------------|---------------|---------------|---------------|
| Internal Conversion Kit<br>內藏電池套件     |     | JF10N2        | JF20N2        | JF30N2        | JF40N2        |
| Wattage<br>適用瓦數                       | (W) | T8 / 10W      | T8 / 18W      | T8 / 30W      | T8 / 36W      |
| Battery Capacity & Voltage<br>電池容量及電壓 |     | 5 x 1.8AH, 6V | 5 x 1.8AH, 6V | 5 x 2.5AH, 6V | 5 x 2.5AH, 6V |
| Emergency Output<br>緊急照明輸出流明          |     | 250 lumens    | 300 lumens    | 350 lumens    | 350 lumens    |
| Minimum Recharging Time<br>電池充滿所需時間   | (h) | 12 hours      |               |               |               |

**NI-CD RECHARGEABLE BATTERY**

| MODEL<br>套件型號                                 |        | JX10CN3                                                        | JX20CN3        | JX30CN3        | JX40CN3         |
|-----------------------------------------------|--------|----------------------------------------------------------------|----------------|----------------|-----------------|
| Internal Conversion Kit<br>內藏電池套件             |        | JF10N3                                                         | JF20N3         | JF30N3         | JF40N3          |
| Wattage<br>適用瓦數                               | (W)    | T8 / 10W                                                       | T8 / 18W       | T8 / 30W       | T8 / 36W        |
| Battery Capacity & Voltage<br>電池容量及電壓         |        | 5 x 2.5AH, 6V                                                  | 5 x 2.5AH, 6V  | 5 x 4AH, 6V    | 5 x 4AH, 6V     |
| Emergency Output<br>緊急照明輸出流明                  |        | 250 lumens                                                     | 300 lumens     | 350 lumens     | 350 lumens      |
| Minimum Recharging Time<br>電池充滿所需時間           | (h)    | 12 hours for 2 hours discharge, 24 hours for 3 hours discharge |                |                |                 |
| Dimension of Metal casing<br>燈箱呎吋 (L x H x D) | (mm)   | 440 x 170 x 90                                                 | 650 x 180 x 75 | 950 x 180 x 75 | 1250 x 180 x 75 |
| Signage Panel<br>燈箱膠片字樣及圖案                    |        | EXIT 出口 or Escape Route Sign                                   |                |                |                 |
| Main Voltage / Frequency<br>市電(交流電)輸入電壓 / 頻率  | (V)    | A/C 220V ( + / - 10% ) / 50Hz                                  |                |                |                 |
| Emergency Starting Time<br>套件緊急照明啟動時間         | (sec.) | <0.3                                                           |                |                |                 |
| Operating Frequency<br>套件運作頻率                 | (kHz)  | 25~28                                                          |                |                |                 |
| Operating Temperature<br>套件運作環境溫度             | (ta)   | 0°C - 55 °C                                                    |                |                |                 |
| Charge Indicator<br>充電指示                      |        | Red LED                                                        |                |                |                 |
| Test Button<br>測試掣                            |        | Press Type                                                     |                |                |                 |
| Low Voltage Protection<br>低壓截止保護線路            |        | Electronic Protection (approx. 1V / cell)                      |                |                |                 |
| Compliance To<br>達致認可標準                       |        | BS 5266-1, BS EN 60598-2-22 and FSD PPA/104A(4th Revision)     |                |                |                 |
| Guarantee Period<br>保用期                       | (M)    | 12 months                                                      |                |                |                 |

Options: Sealed Ni-MH High Temp. Rechargeable Battery will be available on request.

: Clients can choose 30% or 50% lumen output when mains fail.

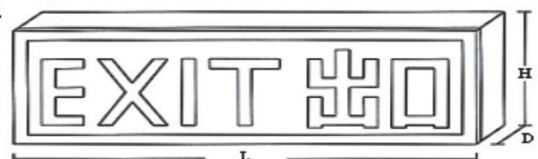



JX10CN2-D 1x10W emergency sign box, white escape route sign with left directional arrow on green background.



JX20CN2, 1x18W emergency EXIT sign box, green letters/characters on white background.




JX20CN-slim, 50Hmm



JX20CNH3-D c/w NI-MH rechargeable battery.



JX30CN2-L

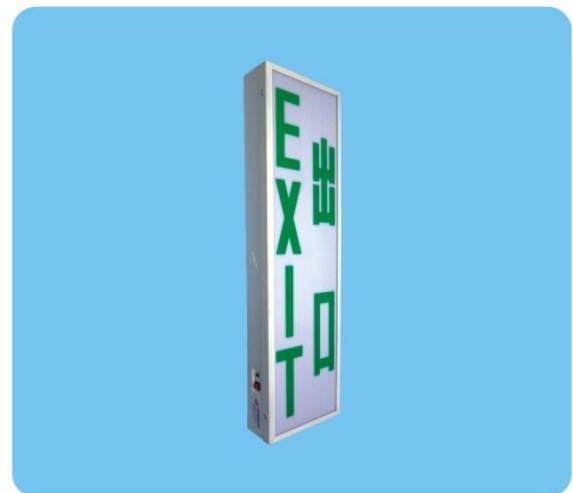

JX20CN2-K