



**CLIP ON  
T5 Series**

**"JOHNSON" - CLIP ON series, Emergency Exit / Directional Sign Box, Maintained type.**  
Application for popular and economical emergency luminaires. The plastic "EXIT 出口"  
legend panel is clipped-on to the rigid housing by means for two screws.

"強生牌" 趨片式系列，長明式緊急照明出口指示燈箱，指示膠片直接趨入燈箱前部份，  
燈箱修邊鐵片，只需由兩粒螺絲固定。

**SPECIFICATION & TECHNICAL DATA**

規格及技術資料

**NI-CD RECHARGEABLE BATTERY**


MODEL 套件型號		JX8CN2	JX14CN2	JX21CN2	JX28CN2
Internal Conversion Kit 內藏電池套件		JF8N2	JF14N2	JF21N2	JF28N2
Wattage 適用瓦數	(W)	T5 / 8W	T5 / 14W	T5 / 21W	T5 / 28W
Battery Capacity & Voltage 電池容量及電壓		5 x 1.8AH, 6V	5 x 1.8AH, 6V	8 x 1.8AH, 9.6V	8 x 1.8AH, 9.6V
Emergency Output 緊急照明輸出流明		250 lumens	300 lumens	350 lumens	350 lumens
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours			

**NI-CD RECHARGEABLE BATTERY**

MODEL 套件型號		JX8CN3	JX14CN3	JX21CN3	JX28CN3
Internal Conversion Kit 內藏電池套件		JF8N3	JF14N3	JF21N3	JF28N3
Wattage 適用瓦數	(W)	T5 / 8W	T5 / 14W	T5 / 21W	T5 / 28W
Battery Capacity & Voltage 電池容量及電壓		5 x 2.5AH, 6V	5 x 2.5AH, 6V	8 x 2.5AH, 9.6V	8 x 2.5AH, 9.6V
Emergency Output 緊急照明輸出流明		250 lumens	300 lumens	350 lumens	350 lumens
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours for 2 hours discharge, 24 hours for 3 hours discharge			
Dimension of Metal casing 燈箱呎吋 (L x H x D)	(mm)	440 x 170 x 90	650 x 180 x 75	950 x 180 x 75	1250 x 180 x 75
Signage Panel 燈箱膠片字樣及圖案		EXIT 出口 or Escape Route Sign			
Main Voltage / Frequency 市電(交流電)輸入電壓 / 頻率	(V)	A/C 220V ( + / - 10% ) / 50Hz			
Emergency Starting Time 套件緊急照明啟動時間	(sec.)	< 0.3			
Operating Frequency 套件運作頻率	(kHz)	25~28			
Operating Temperature 套件運作環境溫度	(ta)	0°C - 55 °C			
Charge Indicator 充電指示		Red LED			
Test Button 測試掣		Press Type			
Low Voltage Protection 低壓截止保護線路		Electronic Protection (approx. 1V / cell)			
Compliance To 達致認可標準		BS 5266-1, BS EN 60598-2-22 and FSD PPA/104A(4th Revision)			
Guarantee Period 保用期	(M)	12 months			

Options : Sealed Ni-MH High Temp. Rechargeable Battery will be available on request.

: Clients can choose 30% or 50% lumen output when mains fail.

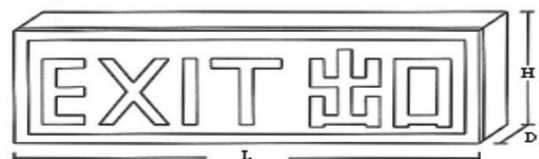



JX8CN2, 1x8W emergency EXIT sign box white letters/characters on green background.



JX8CN2-D 1x8W emergency sign box, white escape route sign with left directional arrow on green background.



JX14CNH2, 1x14W emergency EXIT sign box green letters/characters on white background with NI-MH rechargeable battery.



JX14CNH3-F, 1x14W emergency sign box green escape route sign with right directional arrow on white background with NI-MH rechargeable battery.



JX14CN2-M1



JX14CN2-H