

"JOHNSON" - 4 PIN Compact Fluorescent Lamp series, Emergency 2D Conversion Kit

"強生牌" 四針式 2D 系列燈管鎳鎘緊急照明電池套件。

NI-CD RECHARGEABLE BATTERY

MODEL 套件型號		JF2D16N2	JF2D28N2	JF2D38N2
Wattage 適用瓦數	(W)	2D 16W	2D 28W	2D 38W
Battery Capacity & Voltage 電池容量及電壓		5 x 1.8AH, 6V	5 x 2.5AH, 6V	5 x 2.5AH, 6V
Emergency Output 緊急照明輸出流明		250 lumens	300 lumens	350 lumens
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours		

NI-CD RECHARGEABLE BATTERY

MODEL 套件型號		JF2D16N3	JF2D28N3	JF2D38N3
Wattage 適用瓦數	(W)	2D 16W	2D 28W	2D 38W
Battery Capacity & Voltage 電池容量及電壓		5 x 2.5AH, 6V	5 x 4AH, 6V	5 x 4AH, 6V
Emergency Output 緊急照明輸出流明		250 lumens	300 lumens	350 lumens
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours for 2 hours discharge, 24 hours for 3 hours discharge		
Dimension of Metal casing 鐵箱呎吋 (L x H x D)	(mm)	400(430) x 70 x 120		
Main Voltage / Frequency 市電(交流電)輸入電壓 / 頻率	(V)	A/C 220V (+ / - 10%) / 50Hz		
Emergency Starting Time 套件緊急照明啟動時間	(sec.)	<0.3		
Operating Frequency 套件運作頻率	(kHz)	25~28		
Operating Temperature 套件運作環境溫度	(ta)	0°C - 55 °C		
Charge Indicator 充電指示		Red LED		
Test Button 測試掣		Press Type		
Low Voltage Protection 低壓截止保護線路		Electronic Protection (approx. 1V / cell)		
Compliance To 達致認可標準		BS 5266-1, BS EN 60598-2-22, BS EN 61347-2-7 and FSD PPA/104A(4th Revision)		
Guarantee Period 保用期	(M)	12 months		

Options: Sealed Ni-MH High Temp. Rechargeable Battery will be available on request.


: Clients can choose 30% or 50% lumen output when mains fail.

: Electronic ballast is not included.

: Clients can supply the 2D luminaires for assembly works



JF2D28NH2, with NI-MH rechargeable battery

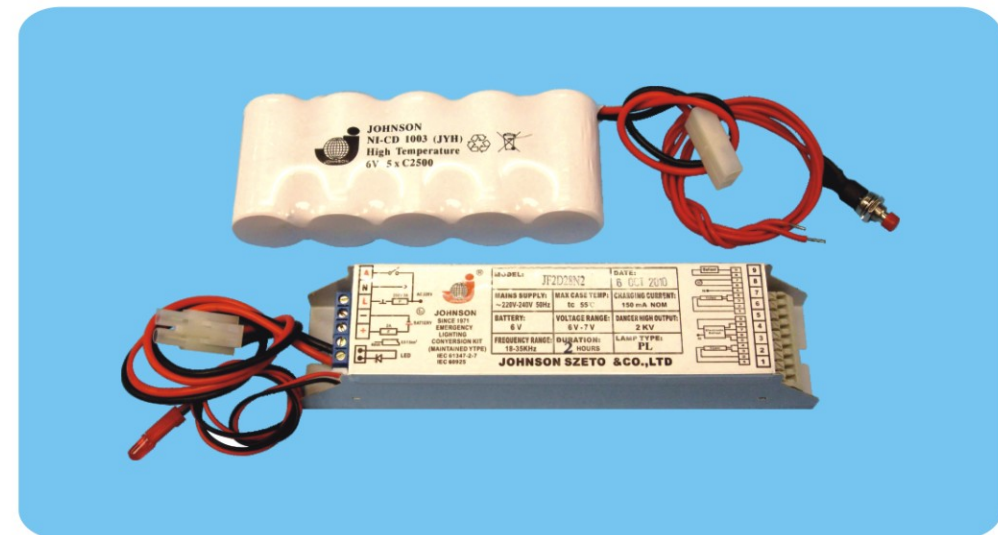

JF2D28N2