



The Characteristic Sign Plate in Macau ELITE T5 Series

"JOHNSON" - ELITE series Emergency Sign Plate.

Designed for easy installation and maintenance. By apply a force, the Perspex attached to the bottom cover of the fitting is easily pull down from the body of the fixture, which is installed inside the false ceiling panel.

"強生牌" 精緻式 系列緊急照明出口指示吊牌，設計便利安裝及方便維修，用力拉下，燈箱底面同水晶吊牌就輕易地與暗藏天花燈箱分離，易於維修。

SPECIFICATION & TECHNICAL DATA

規格及技術資料

NI-CD RECHARGEABLE BATTERY

MODEL 套件型號		JXP8R / SN2-Elite-Q	JXP14R / SN2-Elite-Q
Internal Conversion Kit 內藏電池套件		JF8N2	JF14N2
Wattage 適用瓦數	(W)	T5 / 8W	T5 / 14W
Battery Capacity & Voltage 電池容量及電壓		5 x 1.8AH, 6V	5 x 1.8AH, 6V
Emergency Output 緊急照明輸出流明		300 lumens	350 lumens
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours	

NI-CD RECHARGEABLE BATTERY

MODEL 套件型號		JXP8R / SN3-Elite-Q	JXP14R / SN3-Elite-Q
Internal W/P Fluo. fitting 內藏電池套件		JF8N3	JF14N3
Wattage 適用瓦數	(W)	T5 / 8W	T5 / 14W
Battery Capacity & Voltage 電池容量及電壓		5 x 2.5AH, 6V	5 x 2.5AH, 6V
Emergency Output 緊急照明輸出流明		300 lumens	350 lumens
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours for 2 hours discharge, 24 hours for 3 hours discharge	
Dimension of Metal casing 吊牌箱呎吋 (L1 x H1 x D)	(mm)	440 x 100 x 100	670 x 100 x 100
Dimension of Bottom Plate 底部鐵片呎吋 (L2 x W)	(mm)	480 x 120	720 x 150
Dimension of Perspex 水晶吊牌呎吋 (L3 x H2 x T)	(mm)	400 x 180 x 9	550 x 180 x 9
Signage Panel 燈箱膠片字樣及圖案		出SAIDA口, SAIDA出口 or Escape Route Sign	
Main Voltage / Frequency 市電(交流電)輸入電壓 / 頻率	(V)	A/C 220V (+ / - 10%) / 50Hz	
Emergency Starting Time 套件緊急照明啟動時間	(sec.)	< 0.3	
Operating Frequency 套件運作頻率	(kHz)	25~28	
Operating Temperature 套件運作環境溫度	(ta)	0°C - 55 °C	
Charge Indicator 充電指示		Red LED	
Test Button 測試掣		Press Type	
Low Voltage Protection 低壓截止保護線路		Electronic Protection (approx. 1V / cell)	
Compliance To 達致認可標準		BS 5266-1, BS EN 60598-2-22 and FSD PPA/104A(4th Revision)	
Guarantee Period 保用期	(M)	12 months	

Option: Sealed Ni-MH High Temp. Rechargeable Battery will be available on request.

: Clients can choose 30% or 50% lumen output when mains fail.



JOHNSON



ISO9001:2008
Certificate No:FM56403




JXP8SN3-Elite-W, 1x8W emergency sign plate, white escape route sign with upward arrow on green background.



JXP8SNH3-Elite-T, c/w NI-MH rechargeable battery



JXP8SNH3-Elite-T

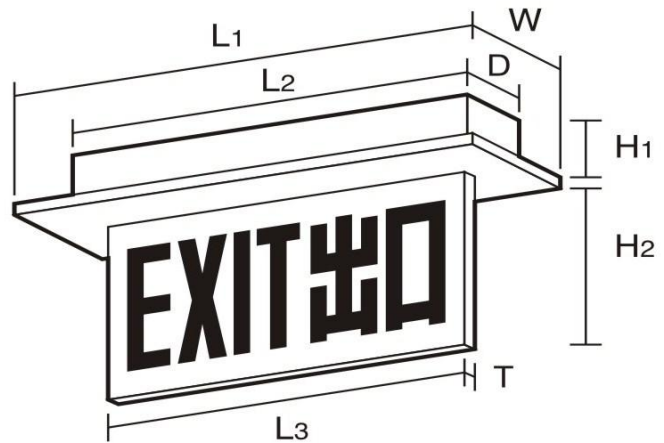

** "JOHNSON" ELITE series are used spring to lock in the box or screws to fix with the box. It depends on the clients needs.