

"JOHNSON" - Energy Saving / LED Lamp series, Emergency SL Conversion Kit

"強生牌" 慳電膽 / LED 膽緊急電池套件


SPECIFICATION & TECHNICAL DATA

規格及技術資料

MODEL 電池套件型號		JF23SLN2/3 , JF23SLNH2/3
Wattage 適用瓦數		3W - 23W Energy Saving Lamps & LED tube lights and LED decorative lamps 8W, 14W, 21W, 28W, 35W (T5) Slim Type Fluorescent Batten
Lamp Base 燈腳		E27, E14, B22, GU10, GU5.3, GX53
Module (Inverter) Dimension L x W x H 電子中樞尺寸	(mm)	200 x 40 x 48
Battery Capacity & Voltage 電池容量及電壓		Below 15W: 10 x 2.5AH, 12V, 15W or above: 10 x 4AH, 12V
Battery Configuration 電池排列方式		Side- by- side Pack
Dimension of Metal casing 鐵箱尺寸 (L x H x D)	(mm)	400(430) x 70 x 120
Charging Current 充電電流	(mA)	180mA nom
Main Voltage / Frequency 市電(交流電)輸入電壓 / 頻率	(V)	A/C 220V (+ / - 10%) / 50Hz
Operation Temperature 運作溫度		0°C - 55 °C
Charge Indicator / Dimension 充電顯示方式 / 呎吋		Red LED
Test Button / Dimension 測試掣 / 呎吋		Press type
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours for 2 hours discharge, 24 hours for 3 hours discharge
Low Voltage Protection 低壓截止保護線路		Electronic Protection (approx. 1V / cell)
Compliance To 達致認可標準		BS 5266-1, BS EN 60598-2-22 and FSD PPA/104A(4th Revision)
Guarantee Period(Battery) 保用期(電池)		12 months


Option: Sealed Ni-MH High Temp. Rechargeable Battery will be available on request.

Wiring Diagram:

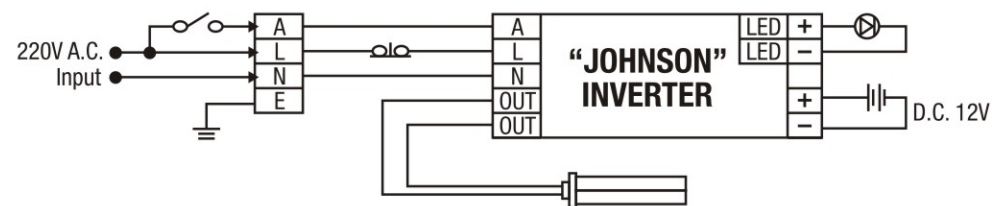

23SL

Energy saving and environmental protection are the trend of the world. "JOHNSON" is specialized in development the emergency conversion kit for LED energy saving lamps and slim T5 fluorescent battens. The battery pack is contained NI-CD / NI-MH rechargeable battery for 2 and 3 hours discharge.

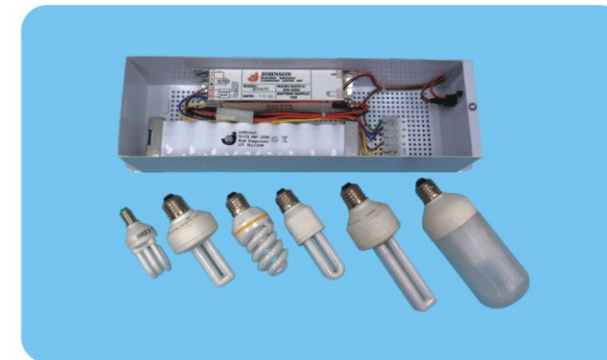

JF23SLN2, Emergency SL conversion kit. It can be suitable for different energy saving lamps.



Reflector series / energy saving lamps



LED lamps: E27



LED lamps: GU4, GU5.3, GU10, E14, E27



LED downlight luminaires



LED tube light