



**ELITE  
T8 Series**

"JOHNSON" - ELITE series, Emergency Exit / Directional Plate which is installed inside the false ceiling. Designed for easy installation and maintenance. By apply a force, the Perspex attached to the bottom cover of the fitting is easily pull down from the body of the fixture. Maintained type.

"強生牌" 精緻式系列，長明式緊急照明出口指示吊牌，設計便利安裝及方便維修，用力拉下，燈箱底面同水晶吊牌就輕易地與暗藏天花燈箱分離，易於維修。

**SPECIFICATION & TECHNICAL DATA**

規格及技術資料

**NI-CD RECHARGEABLE BATTERY**

MODEL 套件型號		JXP10SN2-Elite	JXP20SN2-Elite
Internal Conversion Kit 內藏電池套件		JF10N2	JF20N2
Wattage 適用瓦數	(W)	T8 / 10W	T8 / 18W
Battery Capacity & Voltage 電池容量及電壓		5 x 1.8AH, 6V	5 x 1.8AH, 6V
Emergency Output 緊急照明輸出流明		300 lumens	350 lumens
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours	

**NI-CD RECHARGEABLE BATTERY**

MODEL 套件型號		JXP10SN3-Elite	JXP20SN3-Elite
Internal W/P Fluo. fitting 內藏電池套件		JF10N3	JF20N3
Wattage 適用瓦數	(W)	T8 / 10W	T8 / 18W
Battery Capacity & Voltage 電池容量及電壓		5 x 2.5AH, 6V	5 x 2.5AH, 6V
Emergency Output 緊急照明輸出流明		300 lumens	350 lumens
Minimum Recharging Time 電池充滿所需時間	(h)	12 hours for 2 hours discharge, 24 hours for 3 hours discharge	
Dimension of Metal casing 吊牌箱呎吋 (L1 x H1 x D)	(mm)	440 x 100 x 100	670 x 100 x 100
Dimension of Bottom Plate 底部鐵片呎吋 (L2 x W)	(mm)	480 x 120	720 x 150
Dimension of Perspex 水晶吊牌呎吋 (L3 x H2 x T)	(mm)	400 x 180 x 9	550 x 180 x 9
Signage Panel 燈箱膠片字樣及圖案		EXIT 出口 or Escape Route Sign	
Main Voltage / Frequency 市電(交流電)輸入電壓 / 頻率	(V)	A/C 220V ( + / - 10%) / 50Hz	
Emergency Starting Time 套件緊急照明啟動時間	(sec.)	< 0.3	
Operating Frequency 套件運作頻率	(kHz)	25~28	
Operating Temperature 套件運作環境溫度	(ta)	0°C - 55 °C	
Charge Indicator 充電指示		Red LED	
Test Button 測試掣		Press Type	
Low Voltage Protection 低壓截止保護線路		Electronic Protection (approx. 1V / cell)	
Compliance To 達致認可標準		BS 5266-1, BS EN 60598-2-22 and FSD PPA/104A(4th Revision)	
Guarantee Period 保用期	(M)	12 months	

Options : Sealed Ni-MH High Temp. Rechargeable Battery will be available on request.

: Clients can choose 30% or 50% lumen output when mains fail.



JXP10SN2-Elite, 1x10W emergency EXIT sign plate, white letters/characters on green background.




JXP10SNH3-Elite, c/w NI-MH rechargeable battery.



JXP20SN2-Elite, 1x18W emergency EXIT sign plate, green L/C on white background.



JXP20SNH2-Elite-D, 1x18W emergency sign plate, white escape route sign with left directional arrow on green, c/w NI-MH rechargeable battery.

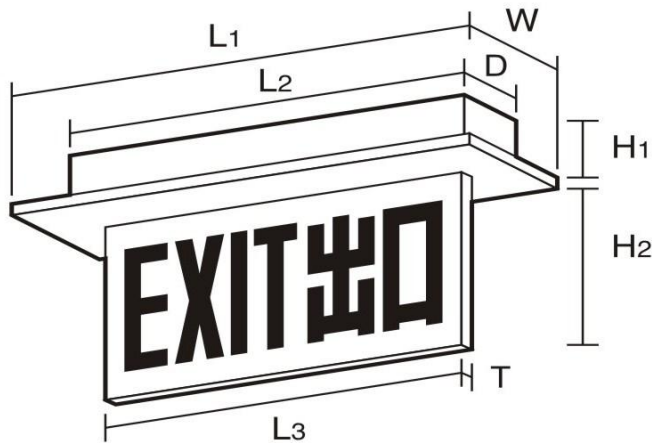

\*\*\*"JOHNSON" ELITE series are used spring to lock in the box or screws to fix with the box. It depends on the clients needs.